

To order standard sized and predrilled wood or metal newels, the stairway rise and run combination must be 7 1/2" Rise and 10" Run. If the stairway does not meet this criteria, select Linear blank wood newels or wood newels for a post to post system to trim and drill at the jobsite.

Stair Balustrade

Choose one:

- Open Treads
- Kneewall

Choose one:

- Both Sides
- One Side

① 684 Rail (2 5/8" x 1 5/8")

Specie _____

② Infill

- 1/8" Cable - 316 Marine Grade
(Interior or exterior)
- 3/4" Hollow Tube
(Interior only; wood newels only)
- 5/8" Hollow Tube
(Interior only; wood newels only)

③ Newels

- Metal (Interior or exterior)
- Wood (Interior only)

Wood PTP Options:
(Interior only; not drilled)

- LJ-4075
- LJ-4110 (3")
- LJ-4000 (3 1/2")
- LJ-4101G (3 1/2")
- AS300MD (3")
- AS350MD (3 1/2")

Specie _____

Options:

- Cable Release Tool
- Cable Cutters
- Stainless Steel Cleaner

Ⓐ Rise: _____

Ⓑ Run: _____

Tread Type: _____

Square nose (t1), Round nose (t2), Box (t3)


Ⓒ Width of Tread: _____

Ⓓ Rake Rail Height: _____ = Top of Tread Nose to Top of Rail

Ⓔ Rake Rail Length: _____ = Newel to Newel

If all Rise and Runs are not the same please specify the dimensions of each rise and run on drawings.

Balcony/Level Run Details

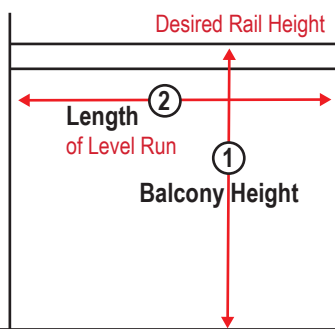

① Choose Desired Rail Height:


- 36"
- 39"
- 42"

② Section 1:

Length _____

Section 2:

Length _____

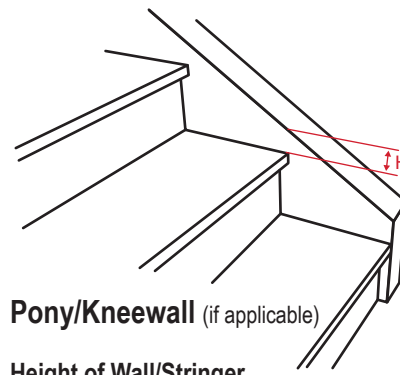

Pony/Kneewall (if applicable)

Height of Wall/Stringer from front top of tread (H): _____

Please supply drawings and pictures

Customer Name: _____

Address: _____

City: _____ State: _____ Zip: _____

Contact Same as above

Name: _____

Phone: _____

Email: _____

Today's Date (mm/dd/yyyy): _____

Additional Notes if needed: